



To connect B-B, pull out pole A to the tlimited stop then tighten the plastic bolt. Same way to the pole #C-D.

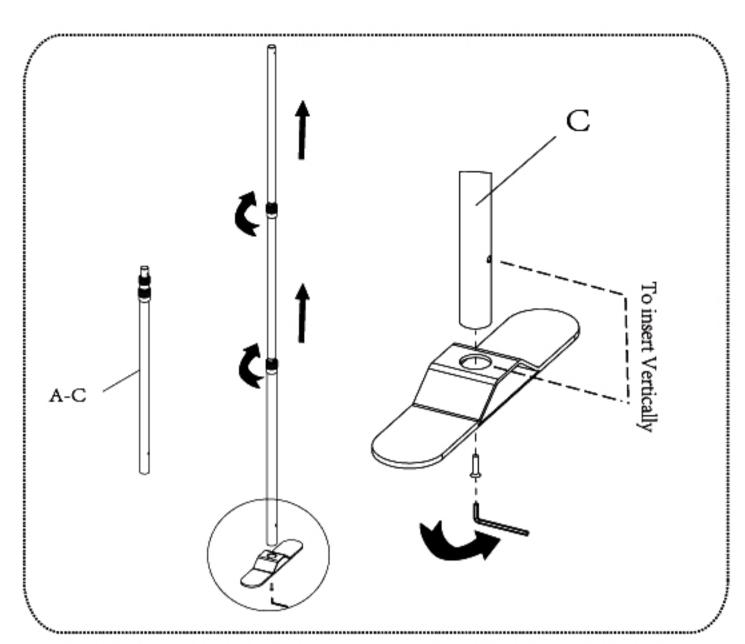

To insert pole #A-C into the socket of base vertically then tightening; Afterwards, screw off #A-C to the limited stop and screw up the plastic bolt.

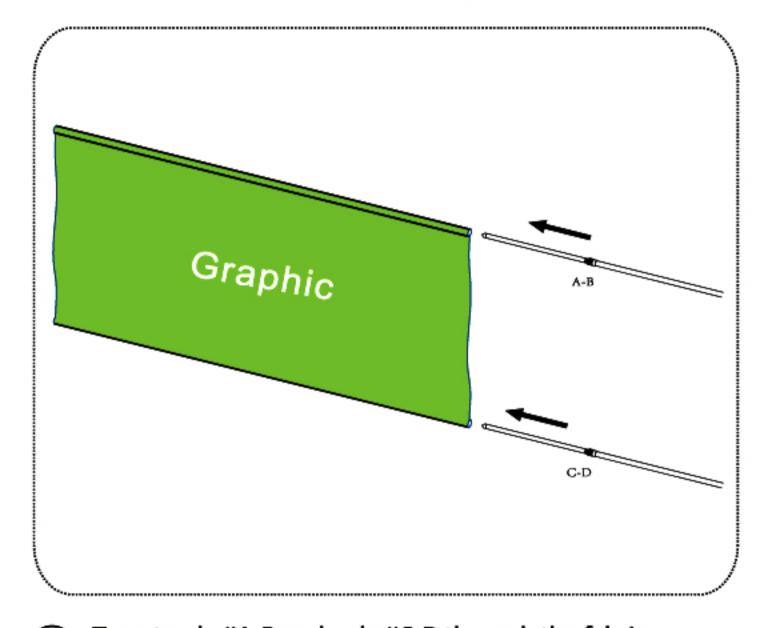

banner hem.

4) To use right number of screw for tightening.

Graphic

